

Westerly™ Whirlpool, Air, Combo and Soaking Tub

❑ 1452018 Westerly Whirlpool

- Equipped with ten (10) adjustable Clean Jets™ that inhibit the growth of mold and mildew
- 13" soaking depth
- Extra soaking depth when used with Eljer Deep Soak™ drain (sold separately)
- Textured bottom helps prevent slips and falls
- Acrylic construction with durable fiberglass backing
- Drop-in installation
- Heater ready design; heater sold separately
- Limited Lifetime Warranty

❑ 1452068 Westerly Air Bath

- Air Bath system produces thousands of bubbles
- Electronic control panel
- Same features as 1452018, less whirlpool jets

❑ 1452448 Westerly Whirlpool and Air Bath Combination

Note variable speed pump is used on Total Massage/combination tubs

- Same as 1452018 plus Air Bath system
- Electronic control pad

❑ 1452002 Westerly Soaking Tub

Nominal Dimensions:

59-3/4" x 59-3/4" x 19-1/2"
(1518 x 1518 x 495 mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2

For factory installed options and finish availability, please visit www.eljer.com

* **NOTE:** Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.



To Be Specified - Required:

- ❑ Color: -00 White, -82 Bone, -96 Biscuit
- ❑ Bath Filler: (specify finish)
- ❑ Bath Drain: (specify finish) Recommended Drain: Eljer Deep Soak drain 1640.315.XXX or American Standard Deep Soak Drain 1640305.XXX

Factory Installed - Options:


- Whirlpool and Air/Whirlpool combination models:
- ❑ Chromatherapy LED lights (3) with control pad - add "K2" suffix to model number

Optional Accessories:

- ❑ 494-1000 - In-line heater (field installed)
- ❑ 7727-00 - Attachable tile flange - cut to desired length

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

MODEL 1452018

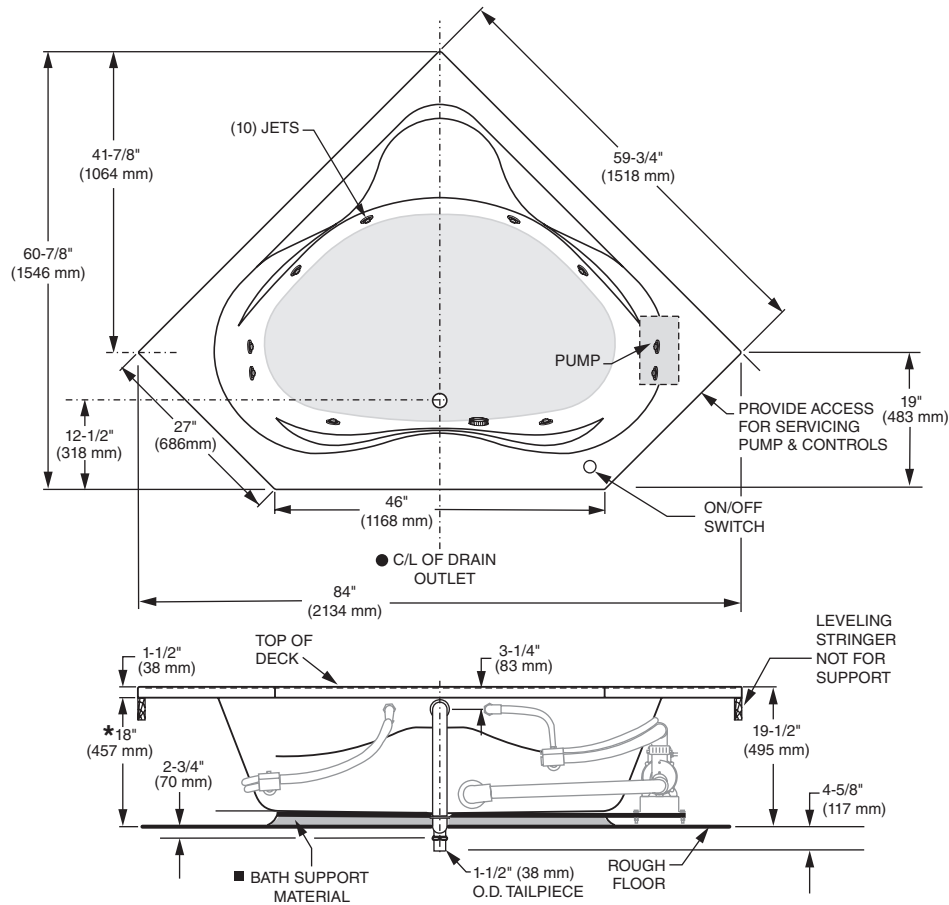

GENERAL SPECIFICATIONS FOR WESTERLY WHIRLPOOL

INSTALLED SIZE	59-3/4 x 59-3/4 x 19-1/2 In.
	(1518 x 1518 x 495 mm)
WEIGHT	115 Lbs. (52 Kg.)
WEIGHT w/WATER	908 Lbs. (412 Kg.)
GAL. TO OVERFLOW	74 Gal. (281 L)
BATHING WELL AT SUMP	30 x 50 In. (762 x 1270 mm)
WATER DEPTH TO OVERFLOW	13 In. (330mm)
FLOOR LOADING	36 Lbs./Sq.Ft. (177 Kgs./Sq.m)
	(PROJECTED AREA)

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

OPTIONAL 3 WALL TILE FLANGE KIT AVAILABLE AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by IAPMO Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.