



## CYPRESS™ WHIRLPOOL HIGH GLOSS ACRYLIC

### CYPRESS™ WHIRLPOOL

#### 015-0005 Cypress Whirlpool

- Six directionally adjustable jets
- Rectangular unit with classic styling
- Constructed of durable acrylic
- Perfect size to replace existing bathtub
- Air on/off switch
- Safety suction system
- Pre-leveled base
- Textured bottom for slip-resistance
- Apron available (optional)
- Limited Lifetime Warranty
- Available in white color only
- No heater blank

#### Nominal Dimensions:

60" x 32" x 18-1/2"  
(1524 x 813 x 469mm)

#### Compliance Certifications -

##### Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs



#### To Be Specified - Required:

- Color:
- Bath Faucet: (specify finish)  
Recommended: 9088900.295 check deck width prior to mounting on unit
- Bath Drain:


#### To Be Specified - Optional:

- 415-0005 - 5' Co-Ex apron/skirt with access panel  
62" x 23" x 3" (1575 x 584 x 76mm)
- 494-0060 - Attachable tile flange

SEE REVERSE FOR PRODUCT DIMENSIONS  
AND SPECIFICATIONS

For color/finish availability and other faucet choices, please  
see [www.eljer.com](http://www.eljer.com)

**MODEL 015-0005**

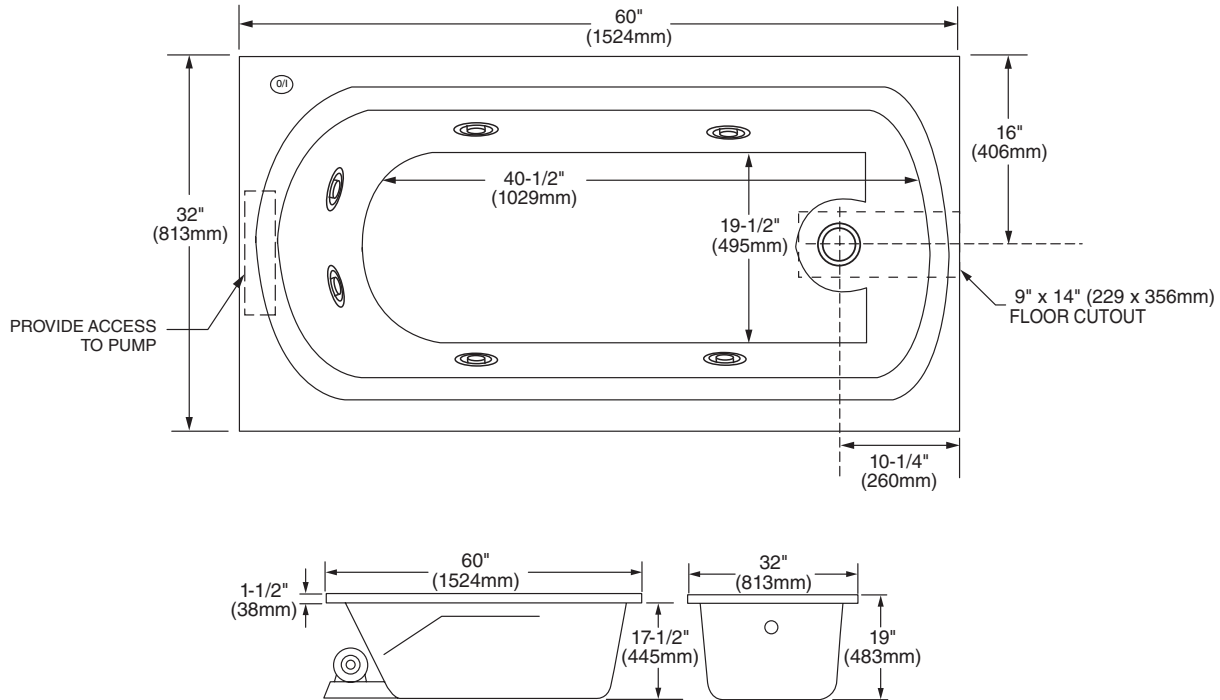

GENERAL SPECIFICATIONS FOR CYPRESS™ WHIRLPOOL	
INSTALLED SIZE	60 x 32 x 18-1/2 In. (1524 x 813 x 469mm)
WEIGHT	98 Lbs. (45 Kg.)
WEIGHT w/WATER	418 Lbs. (190 Kg.)
GAL. TO OVERFLOW	40 Gal. (151 L.)
BATHING WELL AT SUMP	19-1/2 x 40-1/2 In. (495 x 1029mm)
WATER DEPTH TO OVERFLOW	15-1/4 In. (387mm)
FLOOR LOADING (PROJECTED AREA)	31 Lbs./Sq. Ft. (153 Kgs/Sq. m.)
PTS.	14.5
CUBE (FT³)	26.1

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD KIT AND APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.