



SHERIDAN™ WHIRLPOOL AND BATHING POOL HIGH GLOSS ACRYLIC

SHERIDAN™ WHIRLPOOL AND BATHING POOL

- 015-0035 Sheridan Whirlpool**
 - Oval unit with soft contour lines
 - Perfect for corner or alcove installations
 - Six fully adjustable hydro-jets
 - Air on/off switch
 - Electronic control pad enables use of Whirlpool, Air Massage, or both systems simultaneously (Total Massage model only)
 - Safety suction system
 - Pre-leveled base
 - Textured bottom for slip-resistance
 - Factory installed options available
 - Limited Lifetime Warranty

- 015-0031 Sheridan Air Massage Tub**
 - High gloss acrylic
 - Bath with Air Massage system

- 015-0034 Sheridan Total Massage Whirlpool**
 - Same as 015-0035 except with Air Massage system and electronic control pad

- 015-0030 Sheridan Bathing Pool**
 - High gloss acrylic

Nominal Dimensions:

58" x 38" x 20-1/2"
(1473 x 965 x 521mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS



To Be Specified - Required:

- Color:
- Bath Faucet: (specify finish)
Recommended: 9088900.295 (check deck width prior to mounting on unit)
- Bath Drain:

To Be Specified - Optional:


- 494-1000 - In-line heater (field installed)

Factory Installed - Optional:

- 494-6000-00 - Chrome finish hydro-jets (6)
- 494-6000-04 - Polished Brass finish hydro-jets (6)
- 494-6000-25 - Satin Nickel finish hydro-jets (6)
- 494-1005-00 - In-line heater
- 494-8100-00 - Mood light
- 494-8500-00 - Chromotherapy light kit (2 LED lights)
- 494-8505-00 - Remote for chromotherapy light kit

For color/finish availability and other faucet choices, please see www.eljer.com

MODEL 015-0035

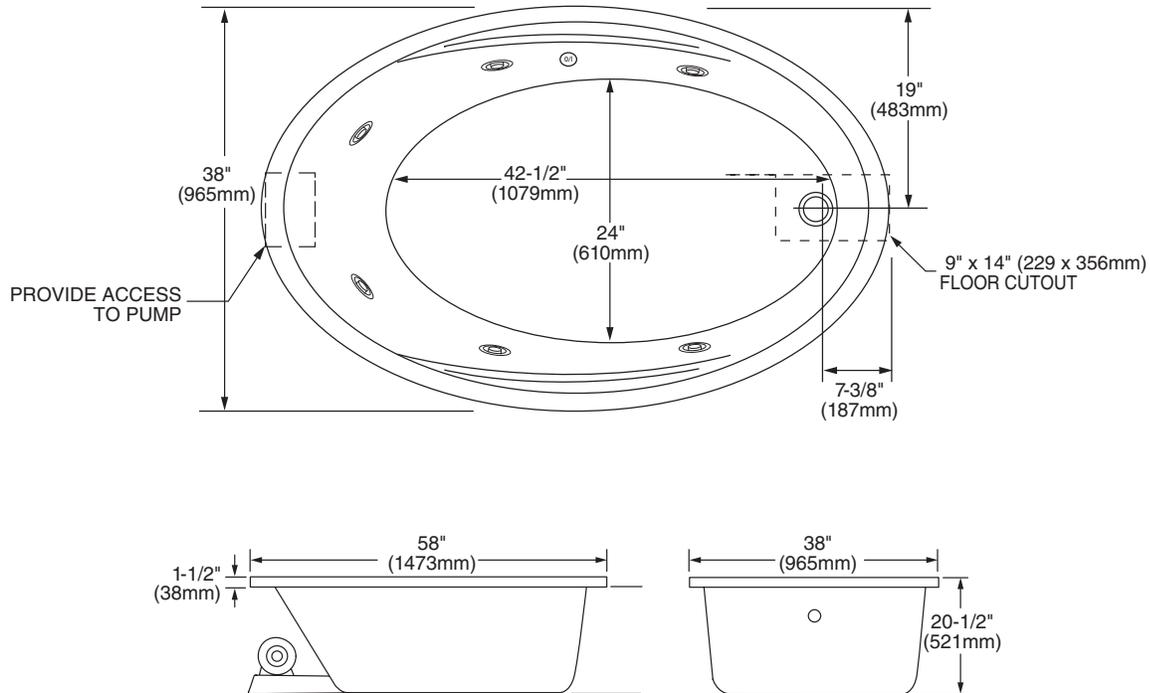

GENERAL SPECIFICATIONS FOR SHERIDAN™ WHIRLPOOL	
INSTALLED SIZE	58 x 38 x 20-1/2 In. (1473 x 965 x 521mm)
WEIGHT	95 Lbs. (43 Kg.)
GAL. TO OVERFLOW	40 Gal. (151 L.)
BATHING WELL AT SUMP	24 x 42-1/2 In. (610 x 1079mm)
PTS.	14.5
CUBE (FT³)	28.6

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.