



TRIANGLE™ WHIRLPOOL AND BATHING POOL HIGH GLOSS ACRYLIC

TRIANGLE™ WHIRLPOOL AND BATHING POOL

- 015-0066 Triangle Whirlpool**
 - Triangular unit with three contoured seating positions
 - Ten fully adjustable hydro-jets
 - Air on/off switch
 - Electronic control pad enables use of Whirlpool, Air Massage, or both systems simultaneously (Total Massage models only)
 - Safety suction system
 - Pre-leveled base
 - Textured bottom for slip-resistance
 - Factory installed options available
 - Apron available (optional)
 - Limited Lifetime Warranty including parts, five year warranty on labor

- 015-0061 Triangle Air Massage Tub**
 - High gloss acrylic
 - Bath with Air Massage system

- 015-0067 Triangle Total Massage Whirlpool**
 - Same as 015-0066 except with Air Massage system and electronic control pad

- 015-0060 Triangle Bathing Pool**
 - High gloss acrylic

- 015-0069 Triangle Whirlpool**
 - Same as 015-0066 except with right-hand pump

Nominal Dimensions:

60" x 60" x 21"
(1524 x 1524 x 533mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs



To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
Recommended: 9088900.295 (check deck width prior to mounting on unit)
- Bath Drain:

To Be Specified - Optional:

- 415-6060 - Removable three-sided apron/skirt, color-matched (specify color)
- 494-0080 - Rigid, attachable corner tile flange
- 494-1000 - In-line heater (field installed)


Factory Installed - Optional:

- 494-7000-00 - Chrome finish hydro-jets (10)
- 494-7000-04 - Polished Brass finish hydro-jets (10)
- 494-7000-25 - Satin Nickel finish hydro-jets (10)
- 494-1005-00 - In-line heater
- 494-8100-00 - Mood light
- 494-8504-00 - Chromotherapy light kit (3 LED lights)
- 494-8505-00 - Remote for chromotherapy light kit

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

For color/finish availability and other faucet choices, please see www.eljer.com

MODEL 015-0066

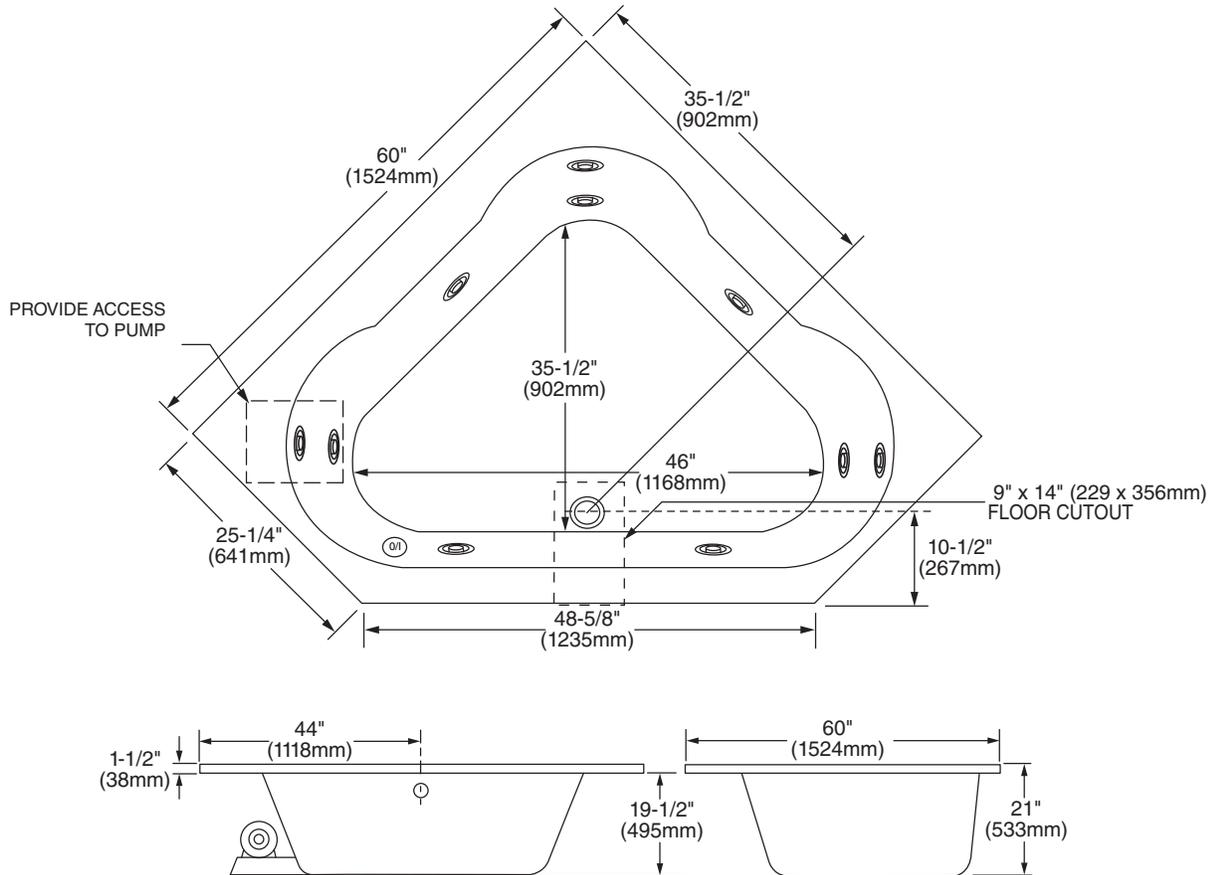

GENERAL SPECIFICATIONS FOR TRIANGLE™ WHIRLPOOL	
INSTALLED SIZE	60 x 60 x 21 In. (1524 x 1524 x 533mm)
WEIGHT	119 Lbs. (54 Kg.)
WEIGHT w/WATER	695 Lbs. (316 Kg.)
GAL. TO OVERFLOW	72 Gal. (273 L.)
BATHING WELL AT SUMP	46 x 35-1/2 In. (1168 x 902mm)
WATER DEPTH TO OVERFLOW	17 In. (432mm)
FLOOR LOADING	34 Lbs./Sq. Ft. (166 Kgs/Sq. m.)
(PROJECTED AREA)	
PTS.	14.5
CUBE (FT³)	51.3

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD KIT AND APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.