

TITAN® RIGHT HEIGHT® ROUND FRONT COMPLETE **TOILET with MOISTURE GUARD INSULATED TANK** VITREOUS CHINA WITH EVERCLEAN®

TITAN® RIGHT HEIGHT® ROUND FRONT COMPLETE TOILET with MOISTURE GUARD **INSULATED TANK**

091-0135NT

- Vitreous china
- EverClean[®] surface inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface
- Low-consumption (6.0 Lpf/1.6 gpf)
- Features No Tools Installation. Everything needed for toilet installation is included and can be hand tightened
- 4" non-adjustable, piston action Accelerator™ flush valve
- 16-1/2" rim height for accessible applications
- Round front siphon action jetted bowl
- 2-3/8" fully-glazed trapway
- Speed Connect[®] tank/bowl coupling system
- Chrome-plated trip lever
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- Includes moisture guard liner
- Color-matched plastic telescoping toilet seat and cover with EverClean® surface
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 10 year warranty on all mechanical parts, and 1 year warranty on seat

Nominal Dimensions:

768 x 457 x 792mm (30-1/4" x 18" x 31-3/16")

Compliance Certifications -


Meets or Exceeds the Following Specifications: ASME A112.19.2-2008/CSA B45.1-08 for Vitreous

China Fixtures

To Be Specified:

- Color: White
- Supply with stop:



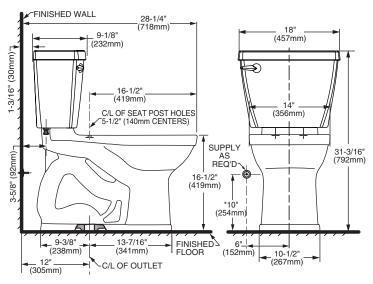

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATEI Y

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



