

COSETTE DUAL FLUSH NORMAL HEIGHT ELONGATED ONE-PIECE TOILET

VITREOUS CHINA

 BARRIER FREE

COSETTE DUAL FLUSH NORMAL HEIGHT ELONGATED ONE-PIECE TOILET

081-0600-00

- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High Efficiency (3.5 Lpf/0.9 gpf - 4.8 Lpf/1.28 gpf)
- Meets EPA WaterSense® criteria
- One-piece design
- Elongated siphon action jetted bowl with 2" trapway
- Internal trapway area fully glazed
- Includes color-matched, slow close, seamless seat
- Includes everything you need, including easy step-by-step manual for simple do-it-yourself installation
- 2" Flush Valve with Chemical Resistant Flapper
- 5-1/2" x 8-1/8" water surface area
- 2 bolt caps
- Chrome plated actuator
- 100% factory flush tested
- 1 year warranty

Nominal Dimensions:

26-1/4" x 16-1/8" x 30-3/8"
(667 x 410 x 773mm)


Supply by others

Compliance Certifications - Meets or Exceeds the Following Specifications:

- A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's

To Be Specified:

- Color:
 - White
- Supply with stop:

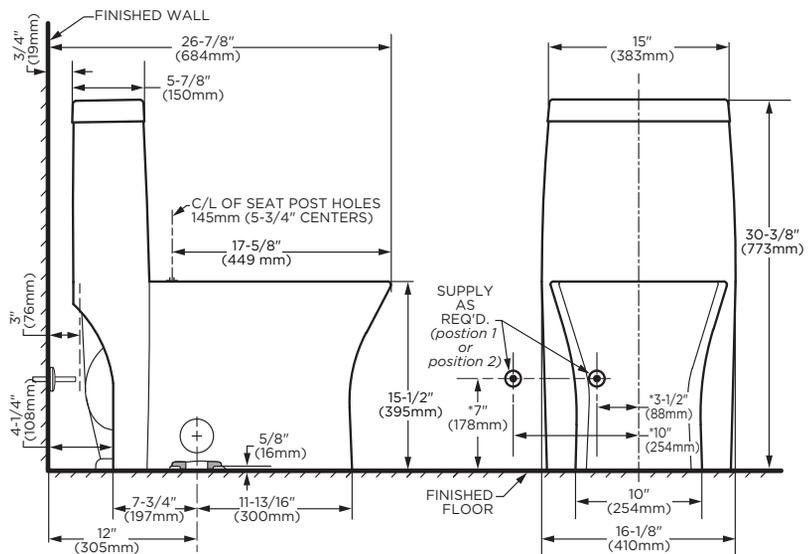

IMPORTANT: Water supply on the wall is required at 3-1/2" (88mm) or 10" (254mm) from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/4" (108mm). In this case, check your supply and hose dimensions.

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

