

CASCADA™ WHIRLPOOL

❑ 025-0005 Cascada™ Whirlpool

- Rectangular unit with classic styling
- Six fully adjustable jets
- Remodel friendly size
- Constructed of durable acrylic
- Textured bottom
- Safety suction system
- Heater blank for simple installation of whirlpool heater
- Apron available (optional)
- Limited Lifetime Warranty
- Available in white color only
- Pre-leveled base
- Push button on/off switch



Nominal Dimensions:

60" x 32" x 19-1/2"
(1524 x 813 x 495mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

To Be Specified - Required:


- ❑ Bath Faucet: (specify finish)
Recommended: 7420901.002
check deck width prior to mounting on unit
- ❑ Bath Drain:

To Be Specified - Optional:

- ❑ 494-1000 - In-line heater* (field installed)
- ❑ 415-0005 - 5' Co-Ex apron/skirt with access panel 62" x 23" x 3" (1575 x 584 x 76mm)
- ❑ 494-0060 - Attachable tile flange - cut to desired length

For color/finish availability and other faucet choices, please see www.eljer.com

* **NOTE:** Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

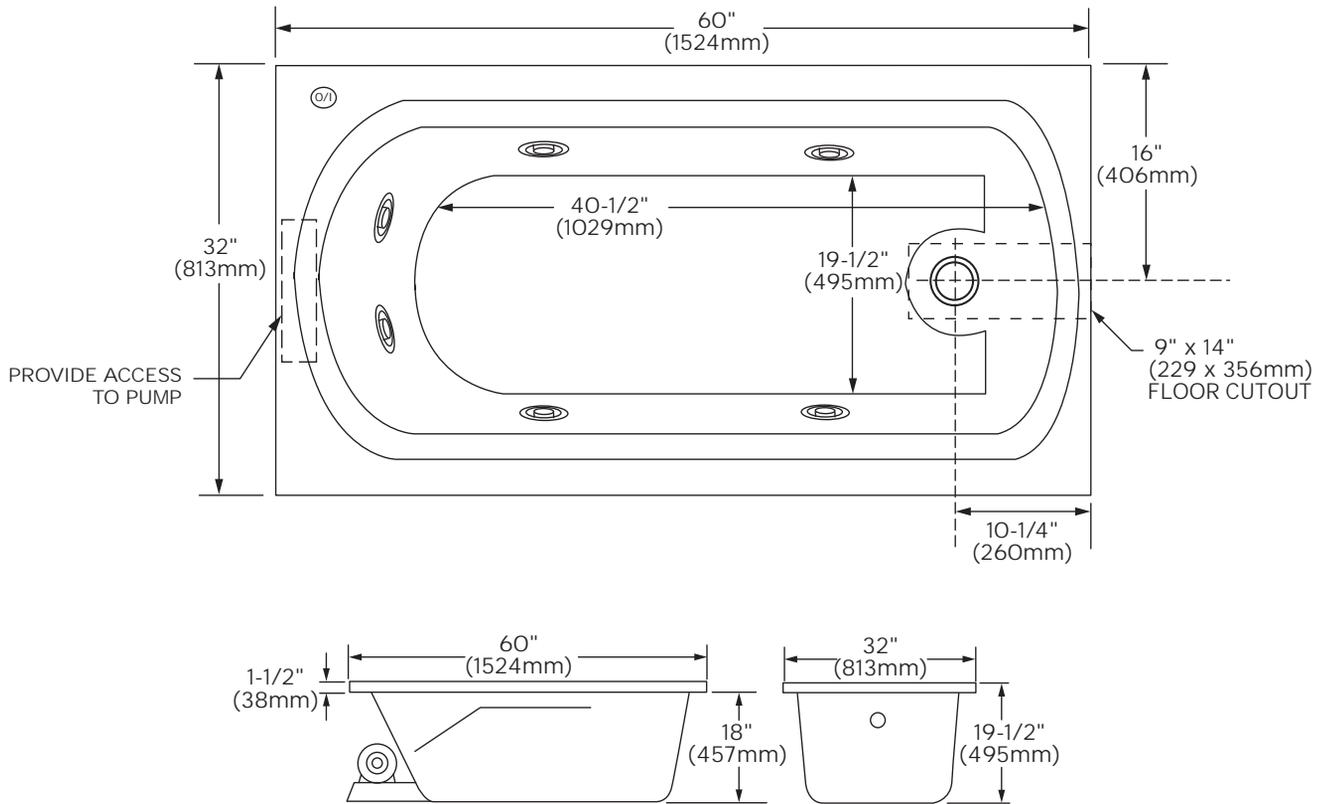

GENERAL SPECIFICATIONS FOR CASCADE™ WHIRLPOOL	
INSTALLED SIZE	60 x 32 x 19-1/2 In. (1524 x 813 x 495mm)
WEIGHT	92 Lbs. (42 Kg.)
WEIGHT w/WATER	425 Lbs. (193 Kg.)
GAL. TO OVERFLOW	40 Gal. (151 L.)
BATHING WELL AT SUMP	18" X 37" (457 x 940mm)
WATER DEPTH TO OVERFLOW	15 In. (381mm)
FLOOR LOADING (PROJECTED AREA)	32 Lbs./Sq. Ft. (156 Kgs/Sq. m.)
PTS.	18.33
CUBE (FT³)	26.11

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILE FLANGE KIT AND APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by IAPMO Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.