

GENESIS™ WHIRLPOOL AND SOAKING TUB

025-5405 Genesis™ Whirlpool

- Oval unit constructed of durable acrylic
- Eight fully adjustable Clean Jets™
- Push button On/Off switch
- Safety suction system
- Pre-leveled base
- Heater blank (heater purchased separately)
- Textured bottom for slip-resistance
- Factory installed options available
- Limited Lifetime Warranty



035-5401 Genesis™ Air Bath

- Bath with gentle air bubble massage system
- Electronic control pad

045-5404 Genesis™ Whirlpool & Air Bath Combination

- Same as 025-5405 plus Air Bath System
- Electronic control pad

015-5400 Genesis™ Soaking Tub

Nominal Dimensions:

71-1/2" x 42" x 22"
(1816 x 1067 x 559mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2

For color/finish availability and other faucet choices, please see www.eljer.com

* **NOTE:** Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)
Recommended: American Standard 1640.305.XXX (specify finish) Deep Soak™ drain

Factory Installed - Options:

All models:

- Chromatherapy LED lights (3) with control pad - add "**K2**" suffix to model number


Whirlpool and Air/Whirlpool combination models:

- Heater - add "**H**" suffix to model number
- Heater and chromatherapy kit - add "**HK2**" suffix to model number (example: 025-5405**HK2**)

Optional Accessories:

- 494-8505 - Remote control for chromatherapy
- 494-1000 - In-line heater* (field installed)

MODEL 025-5405

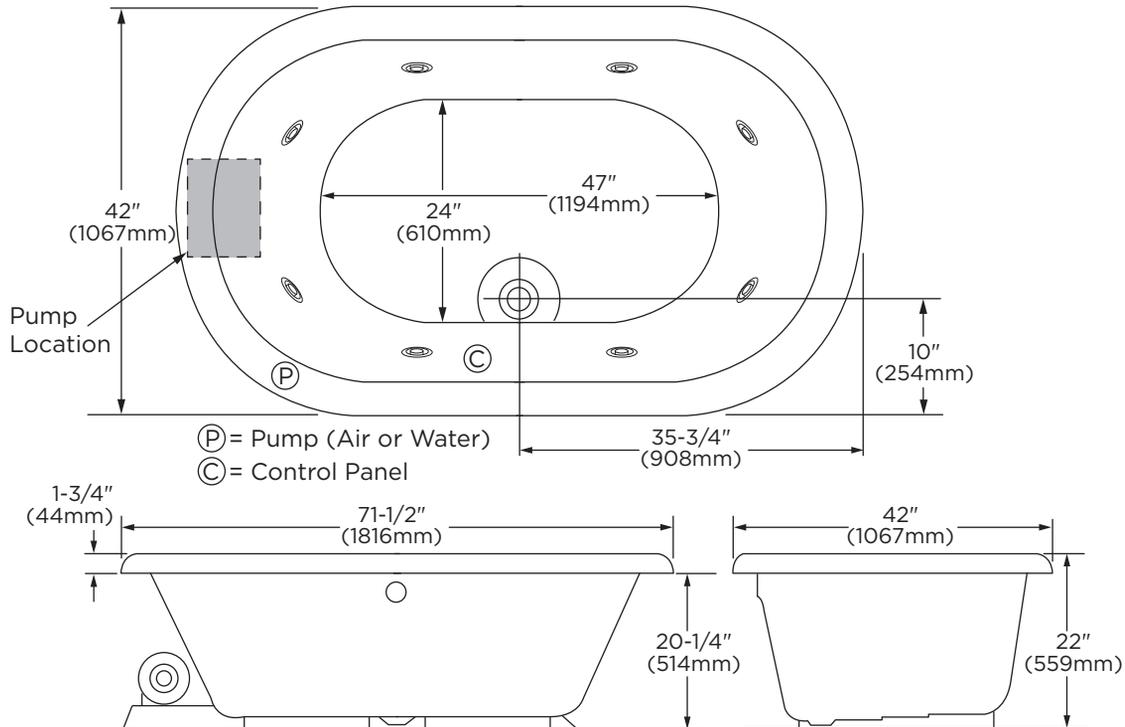

GENERAL SPECIFICATIONS FOR GENESIS™ WHIRLPOOL	
INSTALLED SIZE	71-1/2 x 42 x 22 In. (1816 x 1067 x 559mm)
WEIGHT	131 Lbs. (60 Kg.)
WEIGHT w/WATER	730 Lbs. (332 Kg.)
GAL. TO OVERFLOW	72 Gal. (273L)
BATHING WELL AT SUMP	24 x 47 In. (610 x 1194mm)
WATER DEPTH TO OVERFLOW	15-7/8 In. (403mm)
FLOOR LOADING (PROJECTED AREA)	40 Lbs./Sq.Ft. (196 Kgs./Sq.m)
PTS.	13.8
CUBE (FT ³)	49.93

NOTES:

BATH CAN BE INSTALLED PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS LEVELED BY INTEGRAL FEET. ADDITIONAL SUPPORT IS REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.