

PATRIOT™ WHIRLPOOL AND SOAKING TUB HIGH GLOSS ACRYLIC

PATRIOT™ WHIRLPOOL AND SOAKING TUB

□ 025-0155 Patriot[™] Whirlpool

- Comfortable, rectangular replaces existing bathtubs
- Six fully adjustable Clean Jets™
- Integral apron with removable access panel
- Integral tiling flange
- Pre-leveled tub bottom
- Right hand outlet
- Heater blank (heater purchased separately)
- Limited Lifetime Warranty
- Push button on/off switch

□ 035-0151 Patriot Air Bath

- Bath with gentle air bubble massage system
- Electronic control pad
- Right hand outlet

☐ 045-0154 Patriot[™] Whirlpool & Air Combination

 Same as 025-0155 plus Air Bath system and electronic control pad

□ 015-0150 Patriot[™] Soaking Tub

• Right hand outlet

□ 025-0159 Patriot[™] Whirlpool

• Same as 025-0155 except left hand outlet

□ 035-0158 Patriot[™] Air Bath

• Same as 035-0151 except left hand outlet

O45-0157 Patriot[™] Whirlpool & Air Combination

 Same as 025-0159 plus Air Bath system and electronic control pad

□ 015-0156 Patriot[™] Soaking Tub

Left hand outlet

Nominal Dimensions:

60" x 36" x 19-3/4" (1524 x 914 x 502mm)

Compliance Certifications Meets or Exceeds the Following Specifications:

- Underwriters Laboratories Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2



To Be Specified - Required:

- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: (specify finish)

Recommended: American Standard 1640.305.XXX (specify finish) Deep Soak® drain

Factory Installed - Options:

All models:

☐ Chromatherapy LED lights (3) with control padadd "**K2**" suffix to model number

Whirlpool and Air/Whirlpool combination models:

- ☐ Heater add "**H**" suffix to model number
- ☐ Heater and chromatherapy kit add "**HK2**" suffix to model number (example: 025-0155**HK2**)

Optional Accessories:

- ☐ 494-8505 Remote control for chromatherapy
- □ 494-1000 In-line heater* (field installed)


For color/finish availability and other faucet choices, please see www.eljer.com

* NOTE: Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS



MODEL 025-0155 / 025-0159

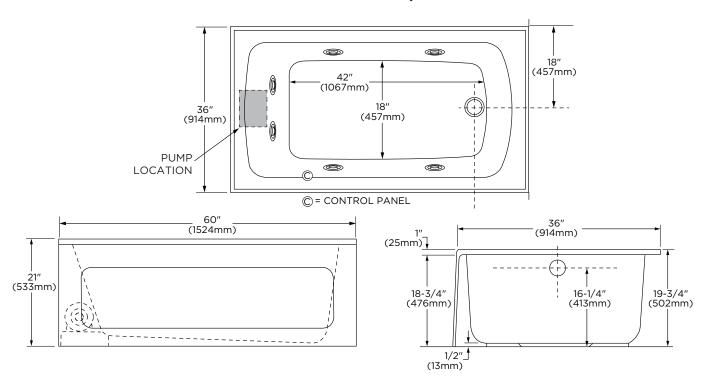

GENERAL SPECIFICATIONS FOR PATRIOT™ WHIRLPOOL	
INSTALLED SIZE	138 Lbs. (63 Kg.) 530 Lbs. (241Kg.) 47 Gal. (178 L) 42" X 18" (1067 x 457mm)
FLOOR LOADING_ (PROJECTED AREA) PTS CUBE (FT³)	_ 35 Lbs./Sq.Ft. (144 Kgs./Sq.m) 8.1 28.74

NOTES:

SUMP OF BATH IS LEVELED BY INTEGRAL FEET. ADDITIONAL SUPPORT IS REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.