

## Stratton™ Whirlpool

### ❑ 1451018 Stratton Whirlpool

- Six (6) water jets can be adjusted for preferred direction and flow strength
- Soothing 15-3/4" (400 mm) soaking depth ensures relaxing coverage
- Molded-in arm rests for added comfort
- Textured bottom helps prevent slips and falls
- Drop-in installation
- Optional apron available for alcove installation, sold separately
- Extra soaking depth when used with Eljer Deep Soak™ drain, sold separately
- Heater-ready design. Heater sold separately
- Limited Lifetime Warranty

### Nominal Dimensions:

60" x 32-3/4" x 19-3/4"  
(1524 x 813 x 502 mm)

### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2

SEE REVERSE FOR PRODUCT DIMENSIONS  
AND SPECIFICATIONS



#### To Be Specified - Required:


- ❑ Bath Drain:  
Recommended Drain: Eljer Deep Soak™ drain  
1640.315.020

#### To Be Specified - Optional:

- ❑ 494-1000 - In-line heater\* (field installed)
- ❑ 4813-00 - 5' apron/skirt with access
  - ❑ 7727-00 - Attachable tile flange -  
cut to desired length

For factory installed options and finish availability,  
please visit [www.eljer.com](http://www.eljer.com)

\* **NOTE:** Whirlpool heater is designed to maintain  
water temperature during operation. It will not  
heat cold water to desired bathing temperature.

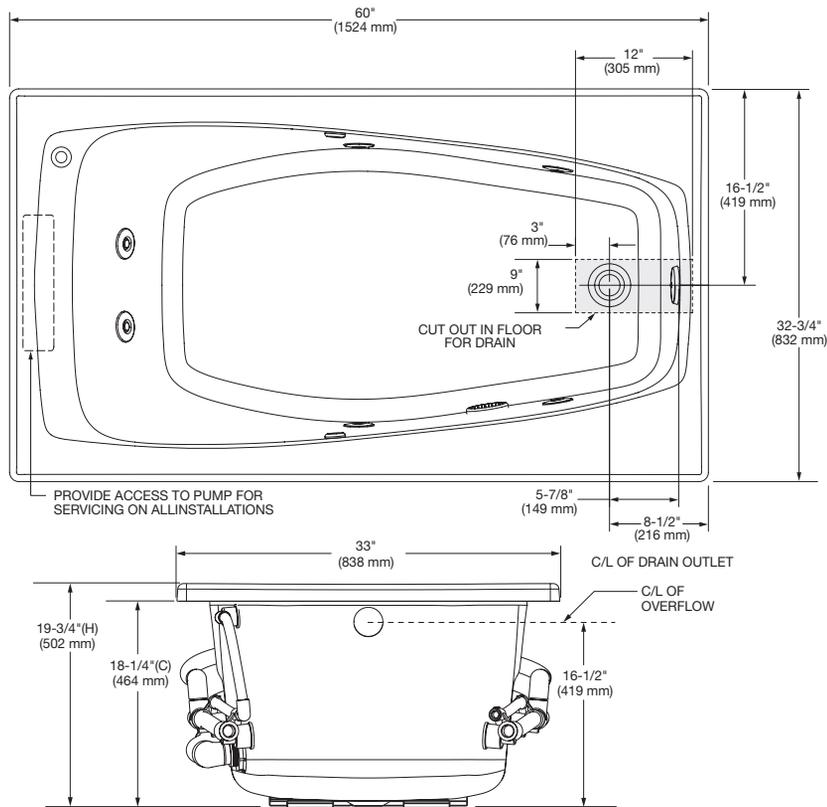

■ DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

<b>GENERAL SPECIFICATIONS FOR STRATTON™ WHIRLPOOL</b>	
INSTALLED SIZE _____	60 x 32-3/4 x 19-3/4 In. (1524 x 832 x 502 mm)
WEIGHT _____	65 Lbs. (30 Kg.)
WEIGHT w/WATER _____	524 Lbs. (237 Kg.)
GAL. TO OVERFLOW _____	55 Gal. (155 L.)
BATHING WELL AT SUMP _____	40-1/2 x 20-1/2 In. (1029 x 521 mm)
WATER DEPTH TO OVERFLOW _____	15-1/4 In. (387 mm)
FLOOR LOADING _____	43 Lbs./Sq. Ft. (213 Kgs/Sq. m.) (PROJECTED AREA)

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILE FLANGE KIT AND APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by IAPMO Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.