





INSTALLATION INSTRUCTIONS CARE AND CLEANING INSTRUCTIONS

WESTLAKE™ BATH 0197000 / 0197025

Thank you for selecting Eljer - an American Standard Brand...products which have been the benchmark of fine quality for over 100 years. To help ensure that this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Carefully unpack and examine your new plumbing fixture. Also be sure your installation conforms to local codes.


Observe Local Plumbing and Building Codes

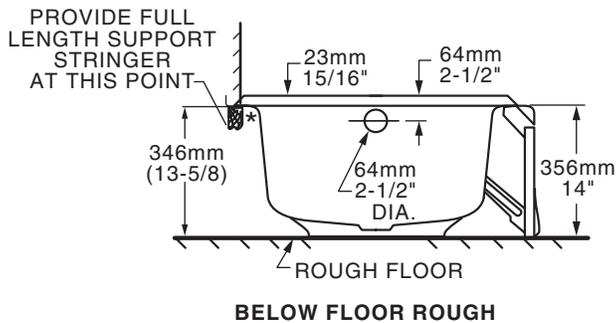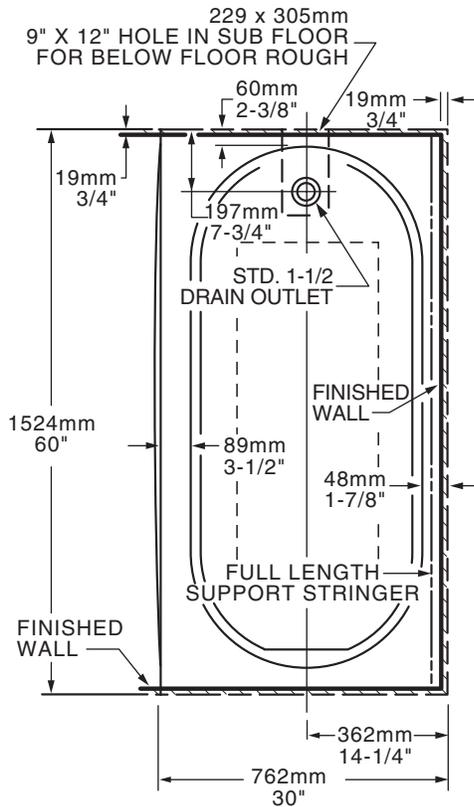

**LEFT HAND TUB ILLUSTRATED
RIGHT HAND TUB IS REVERSED**


1 FRAMING INSTRUCTIONS

Note recess is 1527 x 762mm (60-1/8 x 30). Cut a 229 x 305mm (9 x 12) hole in sub floor for drain, centered 362mm (14-1/4) as shown for below floor rough. Locate studs as required, then ensure rough opening dimensions are proper and supports are plumb and square.

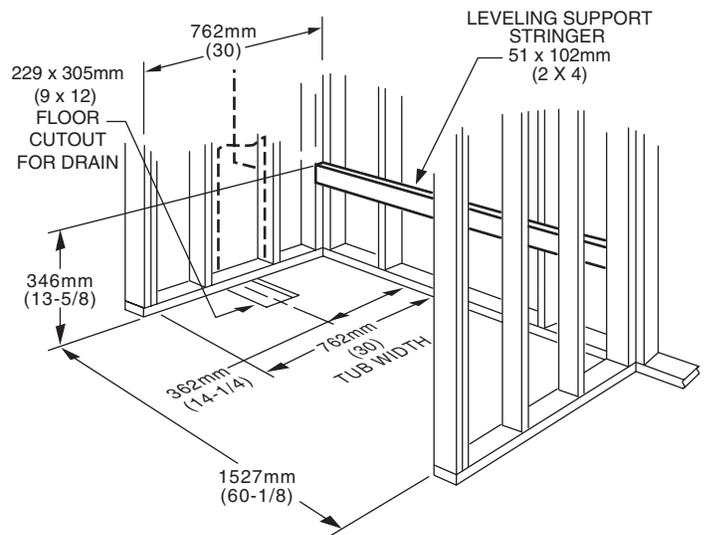



2 DRAIN

Install the overflow and drain assembly onto the tub per manufacturer's instructions.





3 The tub is provided with an integral base for easier installation. Position the bath on the floor and slide into place until the tub is resting on the rear stringer. The base does not need to contact the floor for proper installation. Check level, front to back and side to side. Also check drain clearance hole in sub floor. To secure the tub to wood studs, use roofing nails immediately above the flange of the tub. To secure the tub to steel studs, use drywall screws and flat washers. (See Step 4)

Caution: Take Extra Care When Driving Nails or Screws To Avoid Damaging The Tub. The tile or similar finished floor will be butted against the bottom of the tub apron also holding the tub in place.

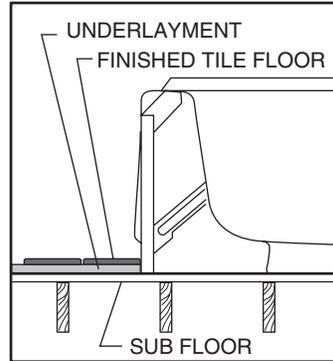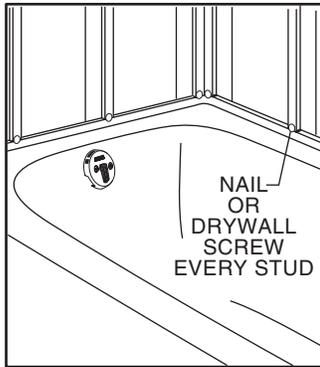

4 Below is shown typical cross sections of the tub rim showing typical wall constructions.

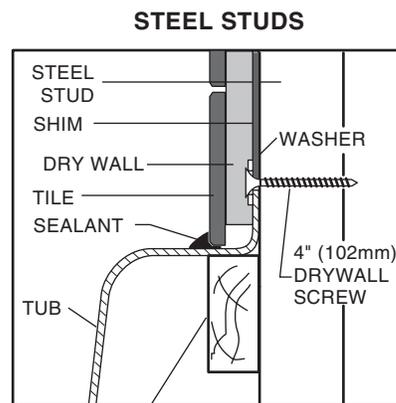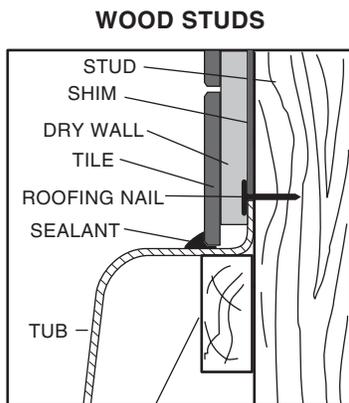

51 x 102mm (2 x 4) WOOD STRINGER FULL LENGTH

CARE AND CLEANING INSTRUCTIONS

Bathtub and Stan-Sure

General Cleaning of the Bathtub

This bathtub should be cleaned with hot soapy water using a soft cloth or sponge. Liquid dishwashing detergents, such as **Palmolive™** or **Dawn™**, work quite well. In areas where the water is hard, a heavy duty liquid laundry detergent, such as **Liquid Tide™**, will work better. DO NOT use any type of scouring pad or abrasive cleansers on the sink. For example, **3M™** cleaning pads, **Comet™**, **Brillo™**.

General Cleaning of the Stan-Sure

The *American Standard Stan-Sure* is a mixture of porcelain and a very hard quartz that provides a safe slip resistant surface. The **Stan-Sure** slip resistant surface is designed to provide a built-in safety feature without unsanitary mats and tapes. Because the surface may accumulate soap and body oils, proper care and cleaning maintenance is important.

We recommend the following cleaning and care instructions for the **Stan-Sure** slip resistant surface.

Use powdered **Bon Ami™**, **Spic 'N Span™**, **didi seven**, or **ZUD** for best results on stubborn stains on the **Stan-Sure** surface.

- 1). Wet tub surface.
- 2). Sprinkle powdered cleaner onto a wet sponge.
- 3). Apply to the stain.
- 4). Rinse with water.

General Cleaning of the Stan-Sure

DO NOT use any type of scouring pad or abrasive cleansers on the **Stan-Sure** surface and bathtub such as **3M™** cleaning pads, **Comet™**, **Brillo™**.

Cleaning Rust Spots on the Stan-Sure

Rust spots may occur during the installation of the bathtub. This happens when metal debris is left inside the bathtub; it is not a defect in the enamel.

Use **Iron Out™**, **ZUD**, **KRC-7**, **didi seven** or **CLR** to remove any rust spots on the **Stan-Sure** surface.

- 1). Wet tub surface.
- 2). Apply cleaner to the stain.
- 3). Scour the stain with a wet sponge.
- 4). Rinse with water.

Again, DO NOT use any type of scouring pad or abrasive cleansers on the **Stan-Sure** surface and bathtub such as **3M™** cleaning pads, **Comet™**, **Brillo™**.

Cleaning Specific Stains on the Stan-Sure

The following are recommendations for specific stains of the **Stan-Sure** surface.

- | | |
|--|---|
| <i>Merthiolate</i> }
<i>Mercurochrome</i> } | Remove with rubbing alcohol and wash with a liquid detergent. |
| <i>Shoe Polish</i> }
<i>and Crayons</i> } | Remove with mineral spirits and wash with a liquid detergent. |
| <i>Rust, Grease,</i> }
<i>or Oil</i> } | Scrub Stain with Iron Our™ , Zud , KRC-7 , didi seven , or CLR and rinse with water. |

ELJERCAST™ LIMITED LIFETIME WARRANTY

If an Eljercast™ brand product is found to be defective in materials or workmanship, after inspection by an authorized American Standard Brands representative, American Standard will repair or, at its option, exchange the product for a similar model. This warranty extends for the lifetime of the product, so long as it remains in use in its original place of installation, except that the warranty applies to a bathing vessel's slip-resisting surface only for the first year after the product's initial installation.

This warranty applies only to the original purchaser and installation of these products.

This warranty **does not apply** to whirlpool components or to faucets, drains, mounting rims, grab bars or other accessories. If manufactured or supplied by American Standard Brands, such whirlpool components and accessories are covered under separate limited warranties.

This warranty **does not apply** to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to assure local code compliance before installation.

This warranty **shall be void** if the Eljercast™ brand product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard Brands' instructions; or if it was modified in a manner inconsistent with the product as shipped by American Standard Brands.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation, **nor shall American Standard be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty.** (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or from province to province, in which case this warranty does not affect such statutory rights.

For service under these warranties, it is suggested that a claim be made through the contractor or dealer from or through whom the product was purchased, or that a service request (including a description of the product model and of the defect) be sent to the following address:

By Mail: American Standard Brands
P.O. Box 659
West Caldwell, N.J. 07007
Attention: Customer Care Center

By Telephone:
1-800-442-1902