BARRIER FREE

TITAN™ 4
TALL HEIGHT ELONGATED COMPLETE TOILET
VITREOUS CHINA WITH EVERCLEAN®

TITAN™ 4 TALL HEIGHT ELONGATED COMPLETE TOILET WITH EVERCLEAN®

❑ **091-4777NT-XXB**

- Vitreous china
- EverClean® surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- Low-consumption (6.0 Lpf/1.6 gpf)
- 4" non-adjustable, flapper-free flush valve
- 16-1/2" rim height for accessible applications
- Elongated siphon action jetted bowl
- 2-3/8" fully-glazed trapway
- Includes everything you need, including easy step-by-step manual for simple do-it-yourself installation
- Color-matched trip lever on White, Bone and Biscuit; Polished Chrome on Onyx toilets
- Includes color-matched slow-close toilet seat with EverClean surface and cover
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- Limited lifetime warranty

Nominal Dimensions:
792 x 498 x 888mm
(31-1/4" x 19-5/8" x 35")

Supply, if needed, by others.

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:
❑ Color:
❑ White ❑ Bone ❑ Biscuit ❑ Onyx
❑ Supply with stop:

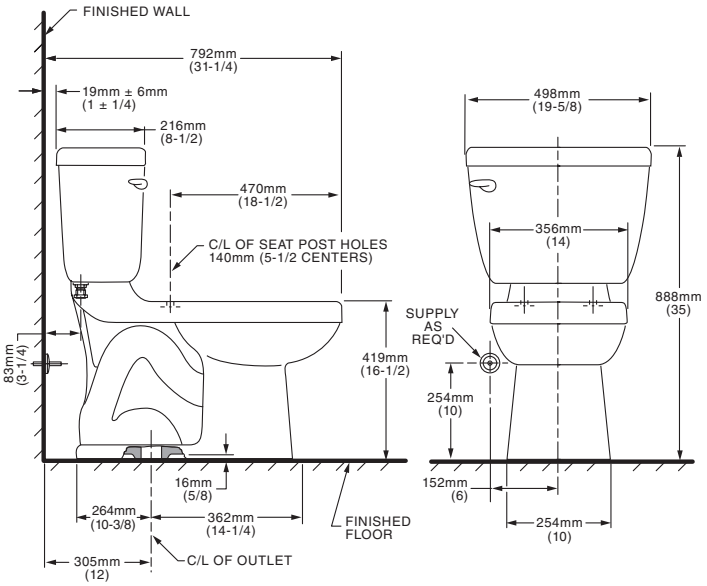

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

No Tools Installation

EVERCLEAN® Surface

© 2011 Eljer